



Single Split Submittal Data:
FTXG15HVJU Indoor Unit
RXG15HVJU Outdoor Unit

Job Name: _____ Location: _____
 Purchaser: _____
 Engineer: _____
 Submitted To: _____ For: Reference Approval Construction
 Submitted By: _____ Date: _____
 Unit Designation: Schedule #: _____ Model No.: _____

Capacities & Efficiencies:

Cooling Rated (Min. ~ Max.)	15,000 (5,300 ~ 18,000) Btu/h
Seasonal Energy Efficiency Ratio	21.0 SEER
Moisture Removal	4.80 Pt/h
Heating Rated (Min. ~ Max.)	18,000 (4,400 ~ 21,200) Btu/h
Heating Seasonal Performance Factor	10.0 HSPF
Cooling Mode Nominal Conditions:	Heating Mode Nominal Conditions:
Indoor: 80°F DB / 67°F WB	Indoor: 70°F DB / 60°F WB
Outdoor: 95°F DB / 75°F WB	Outdoor: 47°F DB / 43°F WB
Pipe Length: 25 ft	Pipe Length: 25 ft

Indoor Unit:

Power Supply (V/PH/Hz)	208-230/1/60
Cooling Airflow Rate (H/M/L)	487/371/258 cfm
Heating Airflow Rate (H/M/L)	494/392/293 cfm
Running Current (Cooling/Heating)	0.15 Amps / 0.16 Amps
Weight	31 lbs
Sound Pressure Level – Cooling (H/M/L)	45/37/29 dBA
Sound Pressure Level - Heating (H/M/L)	44/38/31 dBA

Outdoor Unit:

Power Supply (V/PH/Hz)	208-230/1/60
Cooling Operating Range	14°F – 109°F DB
Heating Operating Range	-4°F WB - 75°F WB -4°F DB - 75°F DB
Humidity Setpoint Range	45% - 60% RH
Minimum Circuit Amps (MCA)	14.5 Amps
Maximum Fuse Amps (MFA)	15 Amps
Starting Current	4.9 Amps
Running Current (Cooling/Heating)	5.49 Amps / 6.20 Amps
Weight	99 lbs
Sound Pressure Level (Cooling/Heating)	50/50 dBA

Piping:

Maximum Height Difference	26 ft
Maximum Length	33 ft
Liquid Piping Connection (OD)	φ1/4"
Gas Piping Connection (OD)	φ3/8"
Condensate Drain Piping Connection (OD)	φ11/16"

Standard Features:


U.S. Compressor Warranty	7 years
U.S. Parts Warranty	5 years
U.S. Limited Labor Warranty	1 year
Flash Streamer Air Purifier	
Wireless Remote Control	

Options:


Titanium Apatite Photocatalytic Air Purifying & Deodorizing Filter	
Centralized Control/Unified On-Off/Scheduled Timer	
Air Direction Adjustment Grill	
Remote Controller Loss Prevention Kit	
Drain Plug	



FTXG15HVJU

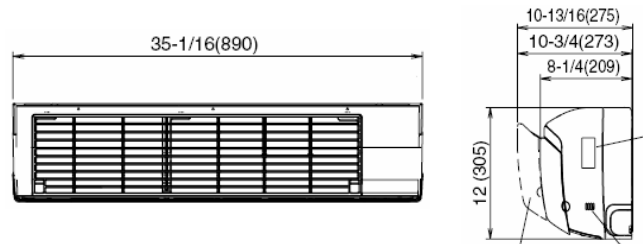

RXG15HVJU

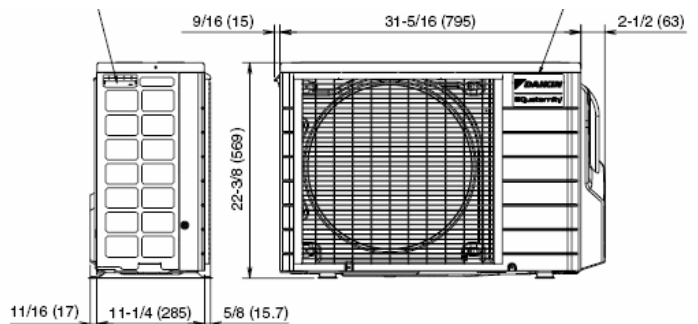

Daikin AC (Americas), Inc. ♦ 1645 Wallace Drive – Suite 110 ♦ Carrollton, TX 75006

SDS FTXG15HVJU_RXG15HVJU 12-08

www.daikinac.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)